




KP SAFES Grade II

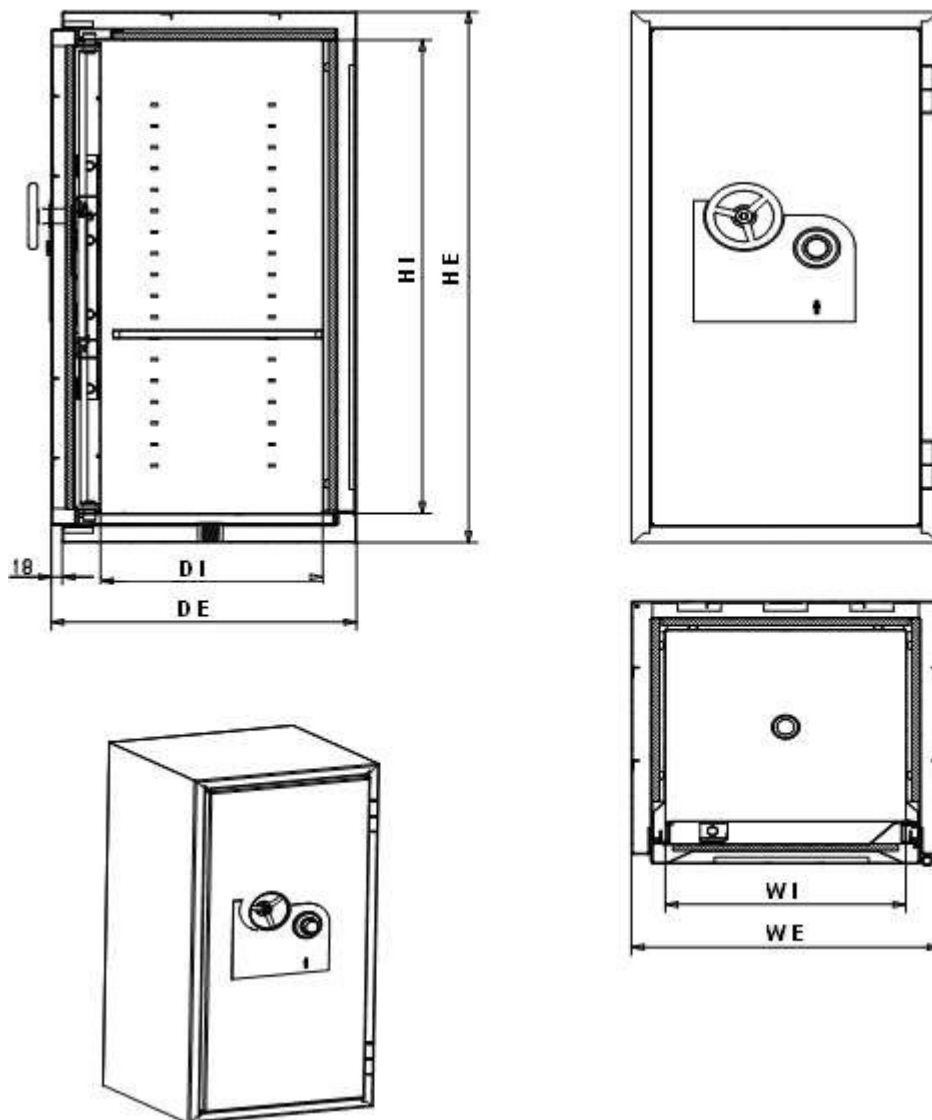

Strongboxes – series of types:

Model	External dimitions			Internal dimitions				Capacity Dm ³	Weight Kg	Door opening radius
	Ext. Height	Ext. Width	Ext. Depth	Int. Height	Int. Width	Int. Depth	Int. Width (in trade)			
KP 45	450	450	455	340	340	321	340	37	60	395
KP 62	620	500	495	510	390	361	390	72	91	445
KP 67	670	500	495	560	390	361	390	79	97	445
KP 100	1000	500	495	890	390	361	390	125	128	445
KP 120	1200	500	495	1090	390	361	390	160	153	445
KP 150	1500	500	495	1390	390	361	390	195	180	445

The overall external dimensions are a result of external product measurement (Ext. Depth) and the handle knob being the most protruding element

Technical parameters:

- Overall casing thickness # 55 mm, door thickness # 80 mm,
- External casing sheet thickness: 2 mm,
- Internal casing sheet thickness: 1,5 mm,
- Door opening radius 200°, external hinges,
- Signboards made of acid-proof sheet,
- Four horizontal bolts,
- Two vertical bolts,
- One bowed fixed bolt protecting the door against opening after damage of hinges,
- Hole at the bottom \varnothing 28 mm for expansion anchor M16 x 200,
- Round handle.

Models	Handle knob	
	Height	Diameter
KP 45	32	80
KP 62	32	80
KP 67	32	80
KP 100	40	125
KP 120	40	125
KP 150	40	125

Used locks


- coded mechanical lock VdS class I
- coded electronic lock VdS class I
- key lock VdS class I

Suggested configurations of locks

- key lock
- coded lock (mechanical or electronic)
- key lock and coded lock

Standard accessories

1. Key lock, A-class
2. Keys for the installed key lock
3. Key for code change in the installed coded mechanical locks
4. Anchor bolt for fitting to the base

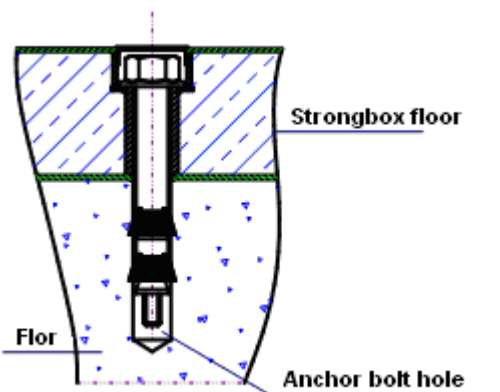

5. Service manual of the installed coded lock (mechanical, electronic)
6. Service manual and instructions for use of products with a guarantee certificate
7. RAL 9002 colour (bright grey)
8. Shelf hooks – 4 pieces per shelf
9. Shelves – maximum load per shelf – 50 kg

Additional accessories

1. Safe deposit boxes individually locked (applicable to KP100, KP120, KP150 only)

Models	Inner box height	Inner box width	Inner box depth	Door opening	
				Height	Width
KP 100	278	387	315	225	317
KP 120	278	387	315	225	317
KP 150	278	387	315	225	317

The chamber is locked individually with a key lock. Standard version is fitted with one safe deposit box (T marking). Additional safe deposit boxes may be installed on personal request, also at the bottom of the main strongbox (in such case the customer assembled the safe deposit box according to the instruction manual).

2. Lead of alarm system wiring
3. Bolt-position and door-opening sensors